

# Mahindra Ambulance

EQUIPPED TO CARE



Also available with AC compatibility

## DESIGNED FOR EMERGENCIES

- Maximum interior space
- Two swing doors to facilitate entry and exit for patients
- Partition between driver and patient cabin with communication window
- Lower turning radius
- Good manoeuvrability in all terrains
- Wider track for more stability
- Better visibility
- Better braking
- JK door on the side for emergencies
- Anti skid, anti rust vinyl flooring
- Stretcher cum trolley for emergencies

## SPACE FOR ALL ESSENTIAL MEDICAL EQUIPMENT


- Twin stretchers (1 scoop type stretcher + 1 stretcher cum trolley)
- Twin bench seat can accommodate two patients or 10 passengers
- Oxygen cylinder bracket (2 no.s)
- Saline bottle bracket (2 no.s)
- Medicine box
- Wash basin with foot operated switch and water tank
- Drain tank

## COMFORTS AND CONVENIENCES FOR THOSE IN ATTENDANCE

- Doctor's chair with cushioned seat
- Attendant seat
- Dust bin
- Water bottle and napkin holder
- FRP pouch and mirror
- Exhaust fan (1 no)
- Fans ( 2 no.s)
- Mobile charger
- Soft look interiors
- Siren and revolving light
- Fire extinguisher
- Lower footstep
- Noiseless patient cabin



The Mahindra Ambulance is designed for the safety and comfort of patients. It is fully built to provide a combination of the best in medical and general utilities. And it comes with the assurance of outperformance that you can expect from every Mahindra product.

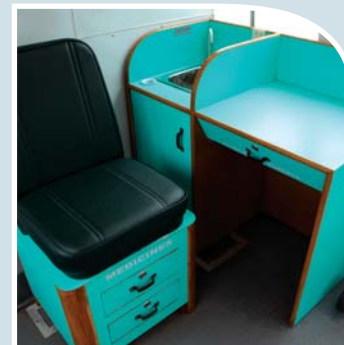


## Technical Specifications: Mahindra Express Ambulance (2 stretcher) BS3

Model	Mahindra Express Ambulance	Mahindra T15 BS3 Ambulance
Engine	MDI Engine, 2523 cc, turbocharged 4 cylinder	NEF Engine, 2609 cc, turbocharged 4 cylinder
Maximum Power	71 HP@ 3200 RPM	78.4 HP @ 3200 RPM
Maximum torque	200 NM @ 1400 - 2200 RPM	205 NM @1800-2200 RPM
Battery	12V, 75AH- 1 no.	12V, 75AH- 2 no.s
Clutch	Single plate diaphragm, 240 mm dia.	
Gear	5 forward and 1 reverse gear, Synchronesh	
Steering	Manual, Recirculating ball & nut type	
Suspension	Semi elliptic leaf spring	
Shock absorbers	Hydraulic double acting telescopic	
Brake	Hydraulic vacuum assisted, dual circuit with TMC & with Auto Adjuster	
Parking Brake	Mechanical type, at the rear of the transmission	
Tyre Size	7.00 X 16 - 14PR	
Fuel Tank Capacity	60 litres	
<b>Dimensions</b>		
Turning diameter (mtrs)	11.2	
Overall length (mm)	4939	
Overall Width (mm)	2060	
Overall height (mm)	2550	
Wheelbase (mm)	2654	
GVW (kgs)	4450	



\* Warranty is applicable only on Ambulance supplied by MTBL. 1 year standard warranty. 2 years extended warranty on drive-line. Please refer to the warranty policy manual for details.

\* Note: In view of our policy of continuously improving our products, we reserve the right to alter specifications or designs without liability. Illustrations and photographs do not necessarily show the vehicle in its standard form. E. & O.E.

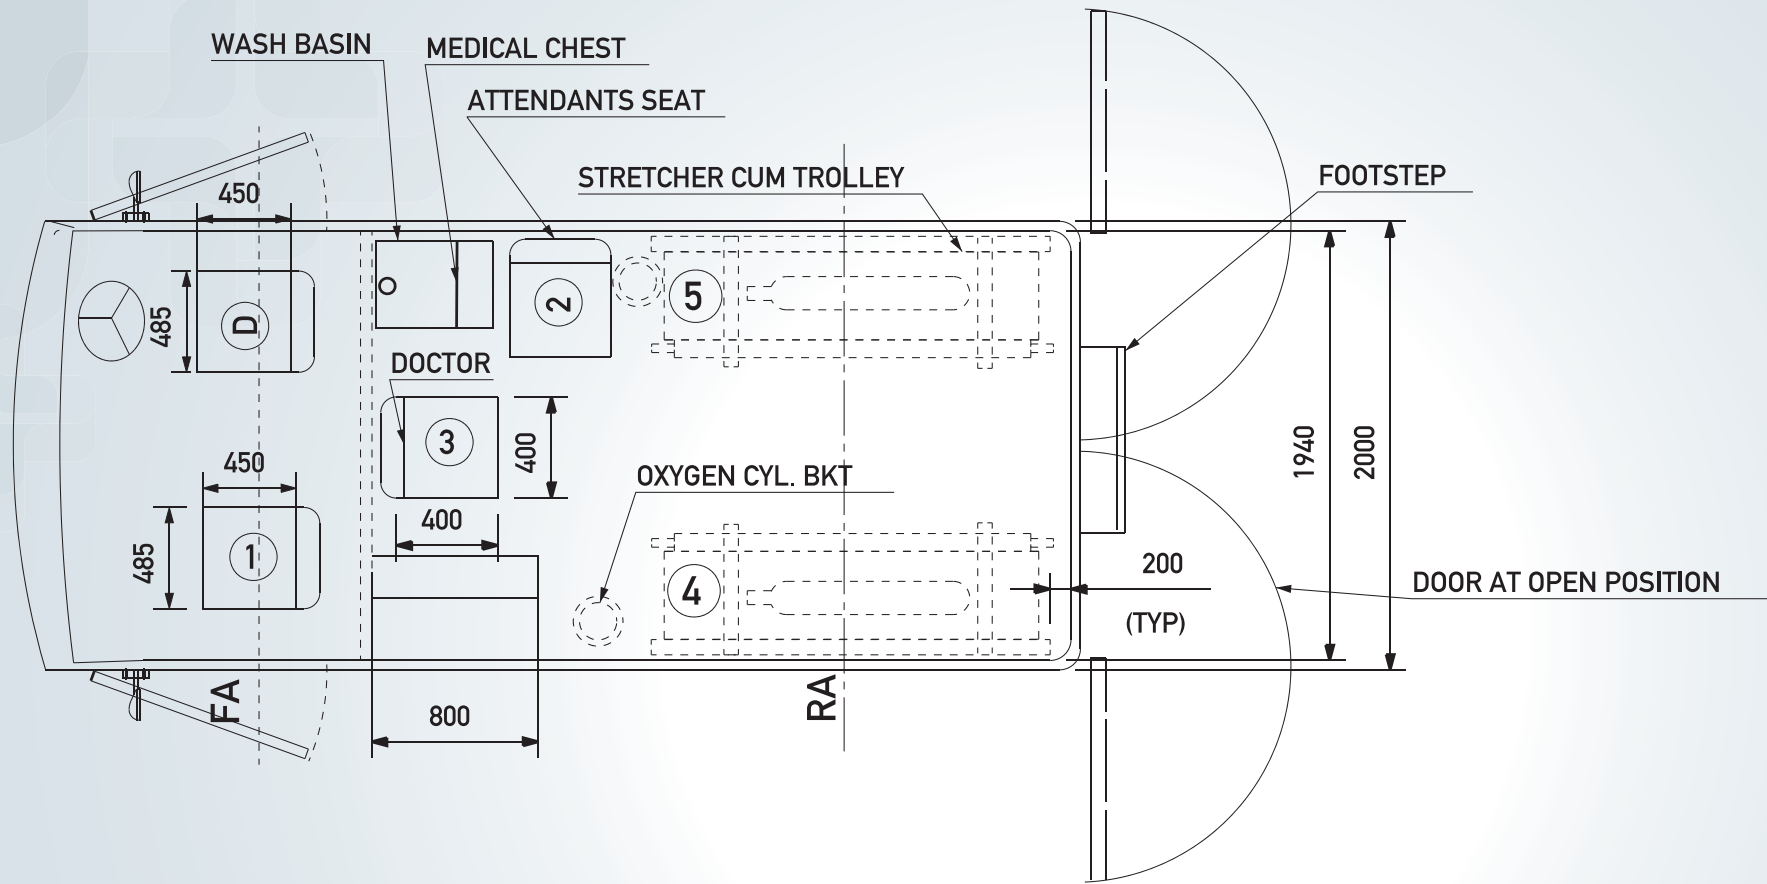

GET IN TOUCH WITH US

 Marketing Division, Mahindra Trucks and Buses Ltd.,  
2<sup>nd</sup> Floor, Mahindra Towers, Worli, Mumbai - 400 018.


 1800-200-3600 (Toll Free)  
NOW | 24X7 EXPERT ON CALL

 'MTBL' to 56767

 Corporate: [contactmtbl@mahindra.com](mailto:contactmtbl@mahindra.com)  
Customer Care: [now24x7@mahindra.com](mailto:now24x7@mahindra.com)

 020-2747 3600  
NOW | 24X7 EXPERT ON CALL

 [www.mahindractv.com](http://www.mahindractv.com)  
[www.mahindratrucksandbuses.com](http://www.mahindratrucksandbuses.com)

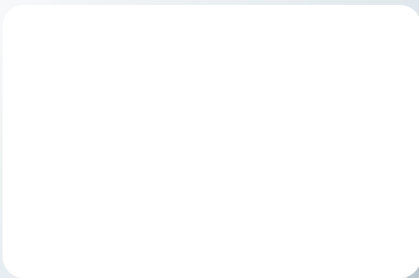

Mahindra Trucks and Buses Limited